



Hydraulic Couplings



TIFOR Kft.

Attila u. 101.

1012 Budapest

tel 06 1 212 99 58

fax 06 1 375 49 79

eMail info@tifor.hu

url www.tifor.hu

**Quick Connect Couplings and Nipples
for Industrial and Mobile Hydraulics**



Customers in industrial and mo CEJN for high-performance

Series 325, Page 13



Series 415, Page 13



Series 605, Page 14



Series 705, Page 14





Mobile hydraulic markets rely on quick connect couplings.



Series 358 Snap-Check Pressure Testing System, Pages 15-17



Series X65 ISO 16028 flat-face couplings, Pages 6-9



Series 525 quick-connect couplings with optional of pressure eliminators, Pages 10-11

CEJN – *Your Responsive Source for Industrial and Mobile Hydraulic Couplings*



For the past five decades, CEJN has been providing reliable, quick couplings styles to customer locations all over the world that need hydraulic and pneumatic couplings to function without failure.

CEJN coupling products in the high-pressure hydraulic market include quick connect couplings with operating pressures up to 300 MPa, porting blocks, pressure gauges, and adapters for a wide variety of fluid applications.

Our company's pneumatic product range includes quick connect couplings with operating pressures up to 3,5 MPa, hose, hose and cable reels, blowguns, and accessories.

Supported by global, ISO-certified assembly and testing operations and an ever-expanding network of distributors, CEJN products are designed to meet the challenges of high-pressure and pneumatic environments and are industry standards in their vitally important, fluid-system applications.

Selling Solutions, Not Substitutes

Our strong, longstanding presence in high-pressure hydraulic and pneumatic markets is the result of focusing our attention on our customers and listening to their needs.

By doing so, CEJN is able to tailor its research and development activities to specific needs – and sell products that are regarded as solutions, not merely substitutes for problem products.

Listening to the Voice of the Customer

This focus on the voice of the customer has led to CEJN's expanding presence in low- and medium-pressure applications in industrial and mobile hydraulics, markets traditionally served by our quick connect coupling styles in ¼" through 2" sizes.

When customers asked us for a way to make hydraulic hose connections quicker and easier, we responded with WEO Plug-In hose fittings, our flagship product entry into mobile hydraulics.



As their name implies, WEO Plug-In threadless fittings simply "plug in" to mobile hydraulic systems, eliminating installation frustrations and the need for special tools.

CEJN's responsiveness to this customer need – and WEO's acceptance as a critical product development solution in agricultural, construction, logging, and mining machinery markets – has prompted more customers to come forward with requests for products to fill specific requirements in low- and medium-pressure applications in industrial and mobile hydraulics.

Series 525 – Popular Coupling for Mobile Hydraulics

Our popular coupling product for mobile hydraulics – Series 525 quick-release couplings – is a case in point. When customers approached CEJN with the need for a heavy-duty coupling, CEJN answered with a reliable product design featuring a hardened nipple, double O-rings, and a backup ring.

Another important product development is CEJN's new Series X65 couplings, a revolution-

ary breakthrough in terms of protecting hydraulic systems – and our environment – from the potential harmful effects of hydraulic fluid leaks.

The flat-face design of Series X65 couplings minimizes spillage during connection and disconnection. And the smooth, flat surfaces of the coupling are easily wiped clean, further reducing spillage and the threat of contamination.

Checking Hydraulic Pressure in a Snap

CEJN has taken the protection of hydraulic systems one step further with the development of its Snap-Check hydraulic pressure testing system. This monitoring system identifies operating pressure surges in a snap – without the need for a permanently installed gauge or transducer.

The growing popularity of our new developments in low- and medium-pressure applications in industrial and mobile hydraulics is proof that when customers ask for something better, CEJN responds with product solutions.

CEJN Series X65

***No-Spill, ISO 16028
Flat-Face Couplings***



Protecting Systems and the Environment from Hydraulic Leaks

Our environment is an irreplaceable asset that needs to be protected now for future generations. Critical to its protection is instilling pollution prevention measures that prevent or reduce pollution at its source.

Pollution prevention means reducing, reusing, and recycling materials rather than putting them into the waste stream. It means implementing conservation techniques. It means promoting the use of non-toxic or less-toxic substances. It means reducing or eliminating waste by modifying production processes.



At CEJN, pollution prevention also means designing and manufacturing products that protect the environment from harm. Our new Series X65 no-spill hydraulic couplings do just that by minimizing hydraulic fluid leakage, which pollutes the atmosphere and hydraulic systems in which it infiltrates.

CEJN Series X65 couplings are "clean connections" for medium-pressure mobile hydraulics in applications such as construction equipment, agricultural machinery, and forestry equipment.

The flat-face design of the couplings mini-

mizes spillage during connection and disconnection – an important step in preventing fire and safety hazards and poor performance in hydraulic systems, and preventing pollution and its associated, costly cleanup measures.

By choosing CEJN's new Series X65 no-spill couplings, you will be contributing to overall improved system performance – and to improving our homeland now and in the years to come.

Series X65 Couplings for Mobile Hydraulics

CEJN's Series X65 flat-face couplings and nipples are specially designed to minimize spillage in mobile hydraulic applications and offer added protection against involuntary disconnection.



Series X65 couplings meet design requirements for **ISO 16028**, an international standard that specifies interface dimensions for interchangeability and performance requirements for hydraulic, flat-face, quick-action couplings at pressures from 25 MPa to 31.5 MPa.

Low Spillage during Connection and Disconnection

The flat-face design of Series X65 couplings minimizes spillage during connection and disconnection. And the smooth, flat surfaces of the couplings are easily wiped clean, further reducing spillage and the threat of contamination entering hydraulic systems.

One-Hand Operation for Easy Connection

Series X65 couplings require only one hand for operation, making connection and disconnection fast and easy. During connection, the coupling and nipple automatically lock into place.

Security Locking for Extra Protection Against Involuntary Disconnection

As added protection against involuntary disconnection, the coupling design includes a manual security-locking feature. It is engaged by manually turning the locking sleeve after connection. The lock is released by returning the sleeve to its original position during disconnection.

Optional Dust Caps Available

To prevent dust and debris from entering the system, dust caps are recommended for use on both the coupling and nipple when they are connected and disconnected. They are available for all sizes and connections (see part numbers on the following page).

DN 6.3 (1/4") to DN 19 (3/4") Sizes

Series X65 couplings are offered in the following size ranges, making them suitable for a wide variety of applications: Series 265 – DN 6.3 (1/4"), Series 365 – DN 10 (3/8"), Series 565 – DN 12.5 (1/2"), Series 665 – DN 16 (5/8") and Series 765 – DN 19 (3/4").

Two-Part Design

Since the two-part couplings feature separate front and back sections, standard line products are available with custom rear sections or threads to meet specific application requirements.

Security-Locking Feature



Connection:

After the nipple is pushed into the coupling and locked into place, turn the locking sleeve manually away from the ball to engage the extra locking feature.




Disconnection:

To unlock the coupling, turn the locking sleeve so that the ball is in line with the mark. The locking sleeve can then be pushed backward to release the nipple.

Technical Data

Material	Coupling: Steel (yellow zinc chromate plating), hardened locking sleeve
	Nipple: Hardened steel (yellow zinc chromate plating)
Seal material:	Nitrile (PUR for DN 19)
Flow capacity at pressure drop 0,1 MPa	DN 6.3–12 l/min (2.6 GPM UK) DN 10–23 l/min (5.1 GPM UK) DN 12.5–45 l/min (9.9 GPM UK) DN 16–74 l/min (16.3 GPM UK) DN 19–100 l/min (22.0 GPM UK)
Max. working pressure:	25 MPa (31.5 MPa DN 6.3)
Min. burst pressure:	100 MPa (126 MPa DN 6.3)
Temperature range:	-30° C to +100° C (-22° F to +212° F)

Flow Chart

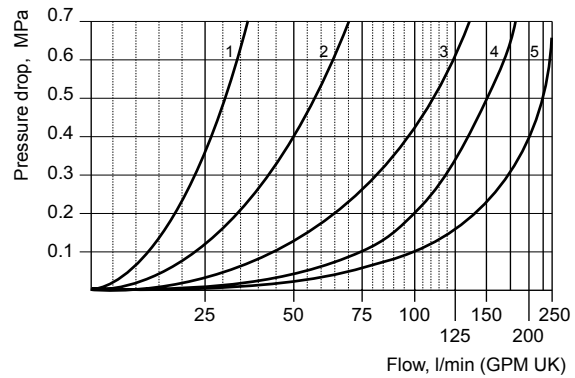

1= DN 6.3
2= DN 10
3= DN 12.5
4= DN 16
5= DN 19

In accordance with ISO 7241-2
viscosity 32 mm²/s (cSt)



		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	6.3	10 265 1102	Rc 1/4"	58.1	27.2	20
		6.3	10 265 1202	G 1/4"	58.1	27.2	20
		6.3	10 265 1402	NPT 1/4"	58.1	27.2	20
		6.3	10 265 1602	7/16"-20 ORB *	58.1	27.2	20
	10	10	10 365 1104	Rc 3/8"	67.5	31.2	24
		10	10 365 1204	G 3/8"	67.5	31.2	24
		10	10 365 1205	G 1/2"	70.9	31.2	27
		10	10 365 1404	NPT 3/8"	67.5	31.2	24
		10	10 365 1604	9/16"-18 ORB *	67.5	31.2	24
		12.5	10 565 1105	Rc 1/2"	76.1	38.2	32
	12.5	12.5	10 565 1205	G 1/2"	74.8	38.2	32
		12.5	10 565 1207	G 3/4"	76.3	38.2	33
		12.5	10 565 1405	NPT 1/2"	74.8	38.2	32
		12.5	10 565 1605	3/4"-16 ORB *	74.8	38.2	32
	16	16	10 665 1101	Rc 3/4"	79.8	41.2	36
		16	10 665 1201	G 3/4"	79.8	41.2	36
		16	10 665 1401	NPT 3/4"	79.8	41.2	36
		16	10 665 1601	1 1/16"-12 ORB *	79.8	41.2	38
	19	19	10 765 1103	Rc 1"	99.8	46.2	41
19		10 765 1203	G 1"	99.0	46.2	41	
19		10 765 1403	NPT 1"	98.8	46.2	41	
19		10 765 1603	1 5/16"-12 ORB *	99.8	50.2	45	
Nipples	Female thread	6.3	10 265 6102	Rc 1/4"	48.7	25.4	20
		6.3	10 265 6202	G 1/4"	48.7	25.4	20
		6.3	10 265 6402	NPT 1/4"	48.7	25.4	20
		6.3	10 265 6602	7/16"-20 ORB *	48.7	25.4	20
	10	10	10 365 6104	Rc 3/8"	55.1	28.5	24
		10	10 365 6204	G 3/8"	55.1	28.5	24
		10	10 365 6205	G 1/2"	58.5	30.4	27
		10	10 365 6404	NPT 3/8"	55.1	28.5	24
		10	10 365 6604	9/16"-18 ORB *	55.1	28.5	24
		12.5	10 565 6105	Rc 1/2"	72.7	35.9	32
	12.5	12.5	10 565 6205	G 1/2"	71.4	35.9	32
		12.5	10 565 6207	G 3/4"	72.9	36.9	33
		12.5	10 565 6405	NPT 1/2"	71.4	35.9	32
		12.5	10 565 6605	3/4"-16 ORB *	71.4	35.9	32
	16	16	10 665 6101	Rc 3/4"	74.9	39.2	36
		16	10 665 6201	G 3/4"	74.9	39.2	36
		16	10 665 6401	NPT 3/4"	74.9	39.2	36
		16	10 665 6601	1 1/16"-12 ORB *	74.9	41.2	38
	19	19	10 765 6103	Rc 1"	93.9	46.2	41
19		10 765 6203	G 1"	93.1	46.2	41	
19		10 765 6403	NPT 1"	92.9	46.2	41	
19		10 765 6603	1 5/16"-12 ORB *	93.9	50.2	45	
Accessories	Dust caps	For couplings:		For nipples:			
		DN	Part No.	DN	Part No.		
	Dust caps for couplings and nipples can be joined together.	6.3	09 265 1000	6.3	09 265 1050		
		10	09 365 1000	10	09 365 1050		
		12.5	09 565 1000	12.5	09 565 1050		
		16	09 665 1000	16	09 665 1050		
19	09 765 1000	19	09 765 1050				

(* = SAE O-ring boss). Thread connections are listed according to ISO Standards (see Page 21 for more information). See Page 18 for pressure conversion information. All measurements are in mm. Check with an authorized CEJN distributor for availability and prices. See Page 20 for general maintenance tips.

Series 525 Couplings for Mobile Hydraulics

CEJN's Series 525 couplings offer a heavy-duty design for mobile hydraulic applications, plus added protection against involuntary disconnection.

Chrome-Plated Steel Couplings in a Standard, Heavy-Duty Design

Series 525 features a heavy-duty design with chrome-plated steel as standard. All parts exposed to extreme strain and stress, such as the locking sleeve and nipple, are made of hardened steel for extra protection. These materials ensure that the couplings offer rugged use and a long service life.

Extra Sealing Capacity

Double O-rings and a backup ring give Series 525 improved sealing performance.

Optional Dust Caps Available

To prevent dust and debris from entering the system, dust caps are recommended for use on both the coupling and nipple when they are disconnected. They are available for all sizes and connections (see part numbers on the following page).

DN 6.3 (1/4") to DN 25 (1") Sizes

CEJN 525 couplings are offered in sizes from 1/4" to 1", making them suitable for a wide variety of applications.

Optional Pressure Eliminator


Both the nipple and coupling are designed with a built-in pressure eliminator, allowing a low-force-to-connect operation, even when either half is under residual pressure.

Security Locking for Extra Protection Against Involuntary Disconnection


As added protection against involuntary disconnection, the coupling design includes a manual security-locking feature. It is engaged by manually turning the black locking ring after connection. The lock is released by returning the ring to its original position prior to disconnection.



Flow Chart

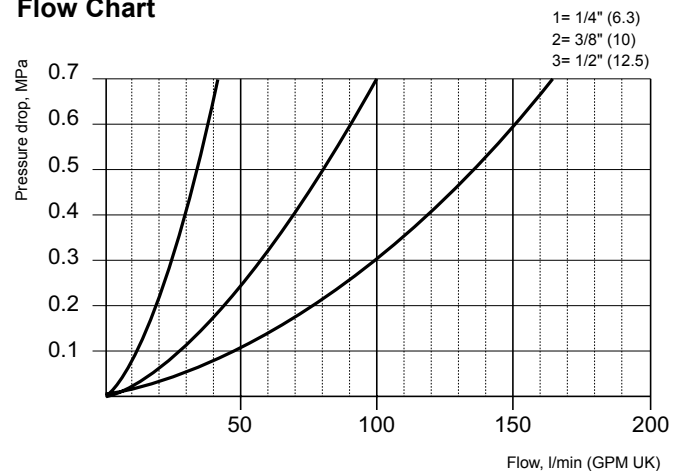

Flow Chart

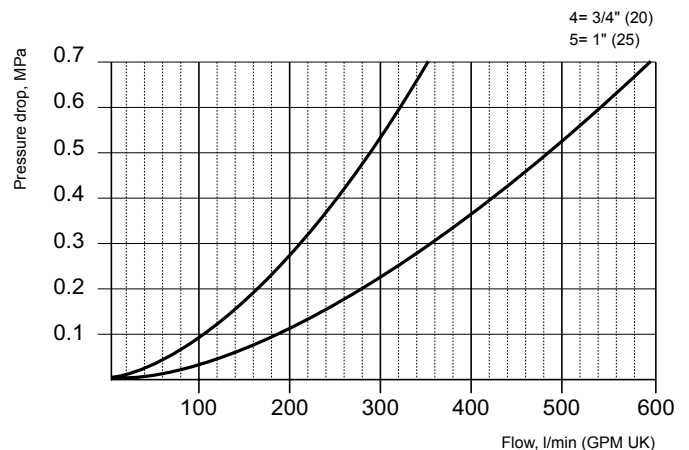

In accordance with ISO 7241-2
viscosity 32 mm²/s (cSt)



Technical Data

Material Coupling: Steel (yellow zinc chromate plating)

Material Nipple: Hardened steel (yellow zinc chromate plating)

Seal material: Nitrile

Nominal flow diameter: DN 6.3 DN 10 DN 12.5 DN 20 DN 25 mm

Flow capacity at pressure drop 0,4 MPa	DN 6.3	DN 10	DN 12.5	DN 20	DN 25 mm
	29 l/min 6.4 GPM UK	69 l/min 15.2 GPM UK	122 l/min 26.8 GPM UK	250 l/min 54.9 GPM UK	425 l/min 93.5 GPM UK

Max. working pressure:	DN 6.3	DN 10	DN 12.5	DN 20	DN 25 mm
Connected:	45 MPa	35 MPa	30 MPa	28 MPa	25 MPa
Disconnected:	30 MPa	28 MPa	25 MPa	20 MPa	25 MPa

Min. burst pressure:	DN 6.3	DN 10	DN 12.5	DN 20	DN 25 mm
Connected:	180 MPa	130 MPa	110 MPa	100 MPa	93 MPa
Disconnected:	120 MPa	110 MPa	100 MPa	80 MPa	100 MPa

Temperature range: 30° C to +100° C (-22° F to +212° F)

Security-Locking Feature



Connection:

Pull the locking sleeve backwards and push the nipple into the coupling. Secure the unit against involuntary disconnection by pushing the black locking ring forward and turn approx. 90°.



Disconnection:

Turn the black locking ring until it pops out. Pull the locking sleeve backwards and simply remove the nipple.



		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	6.3	10 525 1202	G 1/4"	60.0	26.0	21
		10	10 525 1204	G 3/8"	61.6	35.0	24
		10	10 525 1234 *	G 3/8"	61.6	35.0	24
		12.5	10 525 1205	G 1/2"	67.6	41.0	33
		12.5	10 525 1235 *	G 1/2"	67.6	41.0	33
		20	10 525 1207	G 3/4"	76.2	52.0	38
		20	10 525 1237 *	G 3/4"	76.2	52.0	38
		25	10 525 1209	G 1"	92.0	62.0	48
	25	10 525 1239 *	G 1"	92.0	62.0	48	
Nipples	Female thread	6.3	10 525 6202	G 1/4"	48.2	21.0	19
		10	10 525 6204	G 3/8"	38.0	24.0	22
		10	10 525 6234 *	G 3/8"	38.0	24.0	22
		12.5	10 525 6205	G 1/2"	42.5	29.0	27
		12.5	10 525 6235 *	G 1/2"	42.5	29.0	27
		20	10 525 6207	G 3/4"	47.0	39.0	36
		20	10 525 6237 *	G 3/4"	47.0	39.0	36
		25	10 525 6209	G 1"	56.5	48.0	45
	25	10 525 6239 *	G 1"	56.5	48.0	45	
Accessories	Dust caps for couplings	6.3	09 395 1001				
		10	09 475 1001				
		12.5	09 595 1001 **				
		20	09 675 1001				
		25	09 775 1001				
	Dust caps for nipples	6.3	09 375 1051				
		10	09 475 1051				
		12.5	09 575 1051 **				
		20	09 675 1051				
		25	09 775 1051				
Seal kits for couplings	6.3	10 525 4900					
	10	10 525 4901					
	12.5	10 525 4902					
	20	10 525 4903					
	25	10 525 4904					

Couplings / Nipples

* Coupling/nipple with pressure eliminator

Dust Caps

Dust caps can be joined together when the coupling and nipple are connected in order to keep them free of dirt and dust.

** Dust cap for coupling and nipple cannot be joined together.

Seal Kits

Seals kits contain two O-rings and a backup ring.

CEJN's Classic Couplings for Industrial Hydraulics

Hydraulic quick connect couplings for a variety of medium-pressure applications.



CEJN's range of hydraulic couplings offers numerous advantages and is popular in demanding medium-pressure applications in which conventional couplings do not meet requirements. The couplings' automatic connection and disconnection feature, combined with high flow and small external dimensions, provides convenient and trouble-free service.

Wide Choice of Sizes and Materials

The couplings and nipples are available in 1/4" through 1" sizes, with a wide choice of thread standards, such as G, R, NPT, and SAE. The standard series features high-grade steel constructions, and the complete range is also available in brass and stainless steel AISI 316. In addition, one-way shutoff and straight-through versions are also available upon request.

Low Connection Force

The low connection force required for CEJN hydraulic couplings offers wide appeal to operators by minimizing physical stress. Connection and disconnection is by that done very easily for the benefit of the operators.

One-Hand Operation for Easy Connection

CEJN hydraulic couplings require only one hand for operation, making connection and disconnection fast and easy. When connected, the coupling and nipple automatically lock into place.

High Working Pressures

The heavy-duty design of CEJN's series of hydraulic couplings makes them compatible with working pressures up to 32 MPa.

Dust Caps Are Standard

To prevent dust and debris from entering the system and thereby ensuring cleanliness, dust caps are standard on all couplings and nipples in the hydraulic range. They can also be joined together when the coupling and nipple are connected in order to keep them free of dirt and dust.

DN 6.2 (1/4") to DN 19 (3/4") Size

CEJN hydraulic couplings are offered in the following size ranges, making them suitable for a wide variety of applications:

- Series 325 – DN 6.2
- Series 415 – DN 8.9
- Series 605 – DN 14.5
- Series 705 – DN 19

Small External Dimensions


The slim profile of CEJN hydraulic couplings makes them the ideal choice in applications in which space is restricted and confined.

Series 325

25 MPa

Technical Data

Material: Zinc, nickel-plated steel
 Sealing material: NBR, others available on request
 Flow capacity at 0.4 MPa pressure drop: 33 l/min (7.48 GPM UK.)
 Max. working pressure connected: 25 MPa
 Max. working pressure disconnected: 10 MPa
 Min. burst pressure: 100 MPa
 Temperature range: -30°C to +100°C (-22°F to +212°F)
 Nominal flow diameter: 6.2 mm

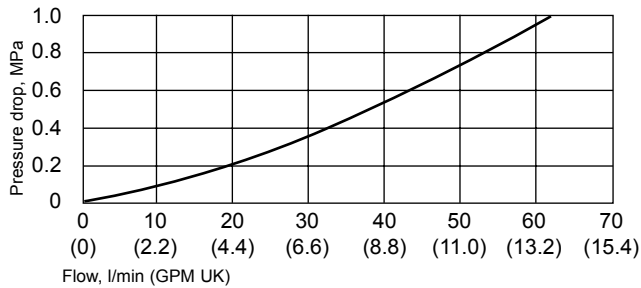

Optional Materials:

Series 324: Brass

Series 326: Stainless steel


		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	6.2	10 325 1202	G 1/4"	56.3	23.4	20
			10 325 1402	NPT 1/4"	56.3	23.4	20
Nipples	Female thread	6.2	10 325 6202	G 1/4"	52.1	23.1	20
			10 325 6402	NPT 1/4"	52.1	23.1	20

Technical Data

Material: Steel (yellow zinc chromate plating)
 Sealing material: NBR, others available on request
 Flow capacity at 0.4 MPa pressure drop: 61 l/min (13.4 GPM UK)
 Max. working pressure connected: 25 MPa
 Max. working pressure disconnected: 10 MPa
 Min. burst pressure: 100 MPa
 Temperature range: -30°C to +100°C (-22°F to +212°F)
 Nominal flow diameter: 8.9 mm

Series 415

25 MPa

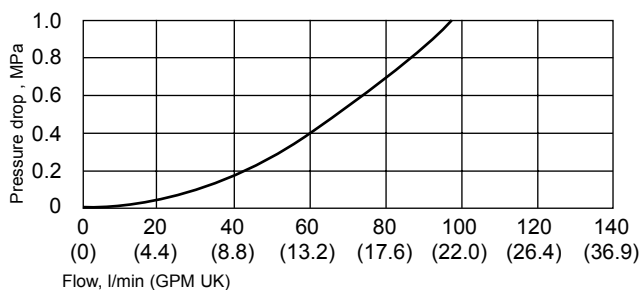

Optional Materials:

Series 414: Brass

Series 416: Stainless steel

		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	8.9	10 415 1204	G 3/8"	66.2	28.4	24
			10 415 1205	G 1/2"	68.7	31.2	27
			10 415 1404	NPT 3/8"	66.2	28.4	24
			10 415 1405	NPT 1/2"	68.7	31.2	27
	Male thread	8.9	10 415 1254	G 3/8"	69.7	28.4	24
10 415 1255			G 1/2"	68.7	31.2	27	
Nipples	Female thread	8.9	10 415 6204	G 3/8"	58.6	31.2	27
			10 415 6205	G 1/2"	62.5	31.2	27
			10 415 6404	NPT 3/8"	58.6	31.2	27
			10 415 6405	NPT 1/2"	61.5	31.2	27
	Male thread	8.9	10 415 6254	G 3/8"	61.1	31.2	27
10 415 6255			G 1/2"	63.1	31.2	27	

All measurements are in mm. Check with an authorized CEJN distributor for availability and prices. See Page 20 for general maintenance advice.


Series 605

32 MPa



Technical Data

Material: Steel (yellow zinc chromate plating)
 Sealing material: NBR, others available on request
 Flow capacity at 0.4 MPa pressure drop: 167 l/min(36.7 GPM UK)
 Max. working pressure connected: 32 MPa
 Max. working pressure disconnected: 10 MPa
 Min. burst pressure: 100 MPa
 Temperature range: -30°C to +100°C (-22°F to +212°F)
 Nominal flow diameter: 14.5 mm

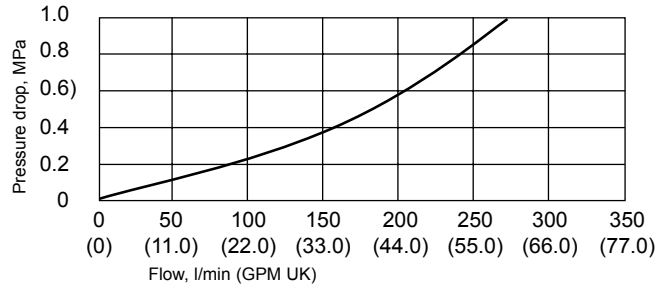

		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	14.5	10 605 1201	G 3/4"	85.4	47.4	41
			10 605 1401	NPT 3/4"	85.4	47.4	41
Nipples	Female thread	14.5	10 605 6201	G 3/4"	80.0	45.0	36
			10 605 6401	NPT 3/4"	80.0	45.0	36

Optional Materials:

Series 604: Brass

Series 606: Stainless steel


Series 705

32 MPa



Technical Data

Material: Steel (yellow zinc chromate plating)
 Sealing material: NBR, others available on request
 Flow capacity at 0.4 MPa pressure drop: 290 l/min (63.8 GPM UK)
 Max. working pressure connected: 32 MPa
 Max. working pressure disconnected: 10 MPa
 Min. bursting pressure: 100 MPa
 Temperature range: -30°C to +100°C (-22°F to +212°F)
 Nominal flow diameter: 19.0 mm

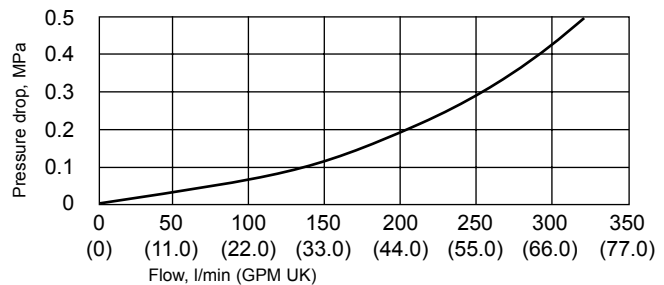

		Size DN	Part No.	Connection	Length	Diameter	Hexagon
Couplings	Female thread	19	10 705 1203	G 1"	95.0	53.1	46
			10 705 1403	NPT 1"	95.0	53.1	46
Nipples	Female thread	19	10 705 6203	G 1"	86.0	53.1	46
			10 705 6403	NPT 1"	87.5	53.1	46

Optional Materials:

Series 704: Brass

Series 706: Stainless steel

See Page 18 for pressure conversion information. All measurements are in mm. Check with an authorized CEJN distributor for availability and prices. See Page 20 for general maintenance tips.

CEJN Snap-Check Hydraulic Pressure Testing System



Monitoring Hydraulic System Pressure in a Snap



CEJN's Series 358 Snap-Check pressure testing system monitors and diagnoses fluid systems in a snap. This monitoring system identifies operating pressure surges without the need for a permanently installed gauge. Applications include mobile equipment, injection molding machines, oil and gas equipment, marine vessels, and production machinery.

Pressure Gauges

Encased in stainless steel AISI 304, the Snap-Check standard range generates a combined bar/PSI reading within an accuracy of ± 1.6 percent of full scale.

High-Pressure Capability

The maximum working pressure of 60 MPa (600 bar) ensures extra long, leak-free service and unsurpassed reliability. The system can also be connected under pressure up to 30 MPa (300 bar) on the nipple side.

Thermoplastic High-Pressure Hose

Extremely flexible, thermoplastic, high-pressure hose assemblies enable users to monitor pressures from remote locations and easily connect gauges in confined areas.

Complete Thread Range

The Snap-Check system is available with G, R, NPT, UNF, or metric threads.

Custom Systems Available

For specific requirements, customized systems are available that include a wide range of gauges.

Dust Caps Are Standard

Standard red plastic (or optional metal screw-on) dust caps keep nipples clean and prevent dirt from entering the system.

Durable Carrying Case

An optional plastic carrying case is handy for transporting the Snap-Check unit to jobsites and keeping system components secure.

Technical data

Nominal flow diameter: Coupling/nipple – 1.5 mm
Hose – 2.0 mm

Max working pressure: 60 MPa (600 bar)

Connection under pressure: 30 MPa (300 bar)

Minimum burst pressure connected: – 130 MPa (1300 bar)

Minimum burst pressure disconnected: – 240 MPa (2400 bar) nipple


Temperature range: -30°C to +100°C / -22°F to +212°F



	Part No.	Connection	Length	Diameter	Hexagon	
Coupling without valve	Female thread connection	10 358 0202	G 1/4"	46.8	23.4	20
		10 358 0402	NPT 1/4"	46.3	23.4	20
	Female, 90° angle thread connection	10 358 0232	G 1/4"	56.3	23.4	22
		10 358 0432	NPT 1/4"	56.3	23.4	22


	Part No.	Connection	Length	Diameter	Hexagon	
Nipple with valve	Male thread connection	10 358 6151	R 1/8"	49.8	19.6	17
		10 358 6152	R 1/4"	53.8	19.6	17
		10 358 6154	R 3/8"	53.8	19.6	17
		10 358 6251	G 1/8"	51.8	19.6	17
		10 358 6282	G 1/4"	53.8	21.9	19
		10 358 6254	G 3/8"	53.8	27.7	24
		10 358 6451	NPT 1/8"	48.8	19.6	17
		10 358 6452	NPT 1/4"	52.8	19.6	17
		10 358 6454	NPT 3/8"	52.8	19.6	17
		10 358 6551	M10 x 1.25	50.8	19.6	17
		10 358 6552	M12 x 1.5	53.8	19.6	17
		10 358 6554	M14 x 1.5	53.8	23.1	20
		10 358 6752	UNF 7/16"- 20	54.8	19.6	17
		10 358 6755	UNF 7/8"- 14	55.3	34.6	30

	Part No.	Connection	Length	Diameter	Hexagon	
Hose	Including adapters Male x Female	19 356 0021	G 1/4" x G 1/4"	850	4.9	19
		19 356 0041	G 1/4" x G 1/4"	1650	4.9	19
		19 356 0061	G 1/4" x G 1/4"	2500	4.9	19
		19 356 0081	G 1/4" x G 1/4"	4000	4.9	19

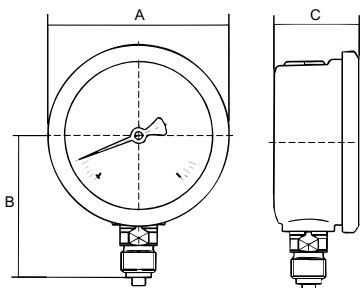


	Part No.	Connection	A	B	C	Pressure Rating	
Pressure Gauge	Male bottom connection	19 356 0107	G 1/4"	68	54	32	0 - 60 bar / 870 PSI
		19 356 0126	G 1/4"	68	54	32	0 - 250 bar / 3 600 PSI
		19 356 0141	G 1/4"	68	54	32	0 - 400 bar / 5 800 PSI
		19 356 0146	G 1/4"	68	54	32	0 - 600 bar / 8700 PSI
		19 940 2120	G 1/4"	68	55	28	0 - 1000 bar / 14 500 PSI

In order to avoid gauge overload, a 40% margin is recommended between the maximum system pressure of the application and the maximum pressure rating of the gauge.



	Part No.	
Accessories	Protective rubber cover	19 942 2500 Blue rubber cover, fits all gauges above
	Metal dust cap	19 950 0095 Screw-on type, metal dust cap with wire strap, fits onto all standard nipples
	Copper seal	Copper seal, ensures leak-free gauge connections
	19 356 0210	A B C 9.3 5.5 3.2
	Rubber/metal seal	Rubber/metal seal for parallel male threaded nipples
	Part No.	Thread
	19 950 0061	G 1/8"
	19 950 0062	G 1/4"
	19 950 0064	G 3/8"
	19 950 0071	M10
	19 950 0072	M12
	19 950 0073	M14
	19 950 0081	7/16" UNF
	19 950 0082	7/8" UNF
	Case	Carrying case, without components
	Part No.	A B
	19 356 0292	375 270

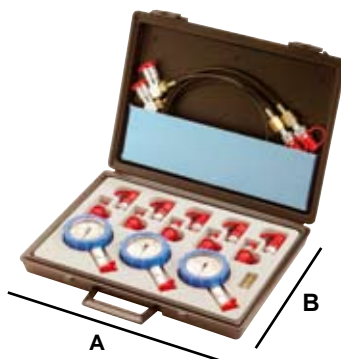

Thread connections are listed according to ISO Standards (see Page 21 for more information). See Page 18 for pressure conversion information. All measurements are in mm. Check with an authorized CEJN distributor for availability and prices. See Page 20 for general maintenance tips.

Units, Conversion Tables, and Formulas

Pressure

From	To	Multiply by	Example
MPa (Megapascal) *	bar	10	10 MPa x 10 = 100 bar
MPa	kp/cm ²	10.197	10 MPa x 10.197 = 101.97 kp/cm ²
MPa	PSI	145.0	10 MPa x 145.0 = 1450 PSI
bar (Bar)	kp/cm ²	1.020	10 bar x 1.020 = 10.2 kp/cm ²
bar	MPa	0.1	10 bar x 0.1 = 1.0 MPa
bar	PSI	14.504	10 bar x 14.504 = 145 PSI
kp/cm ² (kilopound / cm ²)	bar	0.981	10 kp/cm ² x 0.981 = 9.81 bar
kp/cm ²	MPa	0.0981	10 kp/cm ² x 0.0981 = 0.981 MPa
kp/cm ²	PSI	14.223	10 kp/cm ² x 14.223 = 142.2 PSI
PSI (Pounds / square inch)	bar	0.0689	100 PSI x 0.0689 = 6.89 bar
PSI	kp/cm ²	0.0703	100 PSI x 0.0703 = 7.03 kp/cm ²
PSI	MPa	0.00689	100 PSI x 0.00689 = 0.689 MPa
atm (Atmosphere)	bar	1.01325	1.1 atm x 1.01325 = 1.115 bar
atm	kp/cm ²	1.0332	1.1 atm x 1.0322 = 1.137 kp/cm ²
atm	PSI	14.696	1.1 atm x 14.695 = 16.166 PSI
atm	MPa	0.10132	1.1 atm x 0.10132 = 0.111 MPa

Flow

From	To	Multiply by	Example
l/s (liter / second) *	l/min	60	10 l/s x 60 = 600 l/min
l/min (litre / minute)	l/s	0.0167	100 l/min x 0.0167 = 1.7 l/s
l/min	GPM (US)	0.26417	10 l/min x 0.26417 = 2.6417 US gallon/min
l/min	GPM (UK)	0.22	10 l/min x 0.22 = 2.2 UK gallon/min
GPM (US)	l/min	3.7854	10 US gallon/min x 3.7854 = 37.854 l/min
GPM (UK)	l/min	4.5461	10 UK gallon x 4.5461 = 45.461 l/min

Volume

From	To	Multiply by	Example
m ³ (cubic meter) *	liter	1000	10 m ³ x 1000 = 10 000 liter
m ³	ft ³	35.3	10 m ³ x 35.3 = 353 ft ³
liter (liter)	m ³	0.001	100 liter x 0.001 = 0.1 m ³
liter	ft ³	0.0353	100 liter x 0.0353 = 3.53 ft ³
liter	gallon (US)	0.264	100 liter x 0.264 = 26.4 gallon (US)
liter	gallon (UK)	0.220	100 liter x 0.220 = 22.0 gallon (UK)
ft ³ (cubic feet)	m ³	0.0283	10 ft ³ x 0.0283 = 0.283 m ³
ft ³	liter	28.32	10 ft ³ x 28.32 = 283.2 liter
gallon (US)	liter	3.785	10 gallon (US) x 3.785 = 37.85 liter
gallon (UK)	liter	4.546	10 gallon (UK) x 4.546 = 45.46 liter
in ³ (cubic inch)	cm ³	16.387	10 in ³ x 16.387 = 163.87 cm ³
cm ³ (cubic centimeter)	in ³	0.0610	10 cm ³ x 0.0610 = 0.610 in ³

Length

From	To	Multiply by	Example
m (meter) *	ft	3.28083	10 m x 3.28083 = 32.8083 feet
Ft (feet)	m	0.3048	10 feet x 0.3048 = 3.048 m
mm (millimeter)	Inch	0.0393	10 mm x 0.0393 = 0.393 inch
Inch	mm	25.4	10 inch x 25.4 = 254 mm

* SI-unit, international unit according to "Système International d'Unités."

Force

From	To	Multiply by	Example
N (Newton) *	kp	0.1020	10 N x 0.1020 = 1.02 kp
N	lbf	0.2248	10 N x 0.2248 = 2.25 lbf
kp (kilogram force)	N	9.806	10 kp x 9.806 = 98.06 N
kp	lbf	2.205	10 kp x 2.204 = 22.05 lbf
lbf (pound force)	kp	0.454	10 lbf x 0.454 = 4.54 kp
lbf	N	4.448	10 lbf x 4.448 = 44.48 N

Mass

From	To	Multiply by	Example
kg (kilogram) *	lb	2.205	10 kg x 2.205 = 22.05 lb
lb (pound)	kg	0.454	10 lb x 0.454 = 4.54 kg

Torque

From	To	Multiply by	Example
Nm (Newton meter)	kpm	0.1020	10 Nm x 0.1020 = 1.02 kpm
Nm	lbfft	0.7376	10 Nm x 0.7376 = 7.38 lbfft
kpm (Kilo pound meter)	Nm	9.81	10 kpm x 9.81 = 98.1 Nm
kpm	lbfft	7.233	10 kpm x 7.233 = 72.33 lbfft
lbfft (pound force foot)	Nm	1.356	10 lbfft x 1.356 = 13.56 Nm
lbfft	kpm	0.1383	10 lbfft x 0.1383 = 1.38 kpm

* SI-unit, international unit according to "Système International d'Unités."

Technical Data – Measurement and Units

All technical data are measured according to CEJN standards. Contact CEJN for more detailed information.

Oil flow: Measured within an accuracy of $\pm 5\%$. The flow rate is valid at viscosity 30 cSt. (30 mm²/s).

Working pressure: Specified in MPa and often stipulated in varying national and international standards for quick connect couplings.

Burst pressure: Specified in MPa and measured within an accuracy of $\pm 3\%$.

Temperature range: Measured in Celsius degrees within an accuracy of $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$).

Sealing Material – Overview

Material	Features	Temperature Range	Media
NBR Nitril Rubber "Buna-N"	Resistant to water, gasoline, grease, mineral oil and alkalis. Sensitive to ozone.	-30°C– +100°C (-22°F– +212°F)	Compressed air Oil, water
FPM Fluorocarbon Rubber "Viton"	It's recommended for gasoline, oils, and acids. Weather-proof. Not recommended for hot steam.	-15°C– +205°C (-5°F– +401°F)	Chemicals Hot air
EPDM Etylene Propylene Rubber "EPDM"/ "EPM"	Good qualities for hot water, alkalines, and acids. Not recommended for mineral oil.	-40°C– +150°C (-40°F– +302°F)	Water

Contact CEJN for more detailed information regarding sealing material and chemical compatibility with CEJN couplings.

Maintenance Tips

To guarantee a coupling's function, quality, and lifetime, be sure to:

- Avoid dynamic load on the nipple while it is disconnected. Such dynamic load may lead to seal damage, causing leakage in the disconnected mode. The minimum burst pressure on the disconnected nipple is always the same as that of the corresponding coupling.
- Never overload coupling products. Be sure to check the catalog for maximum working pressures. Stated minimum burst pressures are only valid for products unexposed to overload, impacts, corrosion, etc. Improper use of coupling products can result in human injury or death and property damage.
- Keep the coupling and nipple clean and dry. Wipe them off before connection.
- Place the dust caps on the coupling and nipple when they are in the disconnected position.
- In order to keep the dust caps clean, connect them together when coupling and nipple are in connected position.
- Avoid front-end impacts to the coupling and nipple.
- Check the sealing of the coupling and its moving parts regularly. If necessary, replace the coupling.
- Check the nipples on a regular basis. If they are heavily worn or marked, replace them. Worn nipples lead to greater wear on the couplings.
- Choose the proper connection for the application. Oversized connections cause unnecessary wear to the coupling.
- Dust caps can be joined together when the coupling and nipple are connected in order to keep them free of dirt and dust.

Connections and Thread Standards

		Connection	Ø mm	L mm
UNF Thread Connection Unified threads according to ISO 68, ANSI B1.1 Male: ie. 9/16"–18 UNF Female: ie. 7/16"–20 UNF Female, SAE O-ring Boss		Male thread 7/16"–20 UNF 7/8"–14 UNF	11.0 22.0	13.3 15.5
		Female thread 7/16"–20 UNF 9/16"–18 UNF 3/4"–16 UNF 1 1/16"–16 UNF 1 5/16"–12 UNF	9.8 12.9 17.5 26.8 33.1	11.5 12.7 14.3 19.0 19.0
Metric Thread Connection Metric threads according to ISO 68/ISO 724 Male and female: ie. M16x1.5		Male thread M10x1.25 M12x1.5 M14x1.5	9.8 11.85 13.85	9.0 13.0 13.0
BSPT Thread Connection Conical pipe thread according to ISO 7/1 Male: ie. R 1/4" Female: ie. Rc 1/4" (taper)		Male thread R 1/8" R 1/4" R 3/8"	10.2 13.6 17.2	7.4 11.0 11.4
		Female thread Rc 1/4" Rc 3/8" Rc 1/2" Rc 3/4" Rc 1"	11.0 14.5 18.0 23.5 29.5	11.0 11.4 15.0 16.3 19.1
BSP Thread Connection Cylindrical pipe thread according to ISO 228/1 Male: ie. G 1/4" Female (ISO 1179): ie. G 1/4"		Male thread G 1/4" G 3/8" G 1/2"	13.0 16.5 20.8	12.0 12.0 12.0
		Female thread G 1/4" G 3/8" G 1/2" G 3/4" G 1"	11.8 15.3 19.0 24.5 30.8	11.0 11.4 15.0 16.3 19.1
NPT Thread Connection National Pipe Thread American Standard according to ANSI/ASME B 1.20.1 Male and female: ie. 1/4" NPT		Male thread 1/8" NPT 1/4" NPT 3/8" NPT	10.5 14.0 17.5	6.7 10.2 10.4
		Female thread 1/8" NPT 1/4" NPT 3/8" NPT 1/2" NPT 3/4" NPT 1" NPT	8.5 11.0 14.5 18.0 23.0 29.0	6.9 10.0 10.3 13.6 14.1 16.8

CEJN Plugs Innovation into Hydraulic Systems with WEO Plug-In Hose Fittings



WEO Plug-In hose fittings – CEJN's flagship product entry into mobile hydraulics – are helping OEMs simply their hydraulic systems.

"Plugging in" to Hydraulic Systems

CEJN's WEO hose fittings are designed with an innovative click-to-connect feature that eliminates the need for tools or wrenches for connection or disconnection. As the name implies, they simply "plug in" to hydraulic systems.

The product is especially suited for confined or difficult-to-reach locations. Since access for hand-tool clearance is not a requirement, WEO hose fittings are good news for designers, fitters, and operators.

WEO hose fittings make it easier to build compact, reliable hydraulic systems that include hose and tubes. They also slash downtime for field maintenance, since only a common screwdriver is needed to remove hose assemblies.

Additional Benefits

Additional benefits of the patented hose fittings include:

- Increase production throughput upon initial installation
- Self-aligning – eliminating twisted hose that can arise during connection, adding to hose life
- No need for special tools for disassembly

WEO hose fittings are available in single- and double-wire braided hose styles in -4 through -16. The fittings are rated up to 35 MPa (350 bar) in most sizes.

The product's availability in numerous connection options, such as British Standard Pipe and SAEJ514 straight-thread O-ring boss, also add to its widespread appeal.

Product Literature Available

Full details on CEJN's WEO Plug-In hose fittings are available in a comprehensive product brochure and catalog. Copies are available by contacting your nearest CEJN office or representative or visiting www.cejn.com.

Other Products Available from CEJN

To obtain product information or product brochures, contact your nearest CEJN office or representative, or visit us on the Internet at www.cejn.com

» CEJN

- General Product Range

» Gas

- Complete Gas range

» Fluids

- Complete Fluids range
- Non-Drip range

» Pneumatics

- Complete Pneumatics range

» Breathing Air

- Complete Breathing Air range

» Hydraulics

- Complete Hydraulics range

» High-pressure Hydraulics

- Complete High-pressure Hydraulics range
- High-pressure Hose range

» WEO Plug-In

- Complete WEO Plug-In range
- WEO Plug-In Cartridge range

» Multi & Auto

- Autocouplings range
- Quick-Seal range
- Multi-Snap range



The Global



**Quick Connect
Specialist**



**Traditions and Innovations.
Quick connect couplings and systems
for compressed air, low- and high-pressure
hydraulics, fluids, gases, and
breathing air applications.**

www.cejn.com

TIFOR_{Kft.}

Attila u. 101.

1012 Budapest

tel 06 1 212 99 58

fax 06 1 375 49 79

eMail info@tifor.hu

url www.tifor.hu